


LED Decrative Light




Technical Features

Body	High intensity Spinning Aluminum body	Input Voltage (v)	220-240V	Frequency (Hz)	50 - 60
LED	Lumileds / Cree / Osram	CRI	>70Ra	IP Rate	IP66
Lens	Modular Optical Lens	Power Fac.	>0.95	RAL Code	Customized
Diffuser	PC diffuser	Working Temp.	-35°C~+55°C	Options	LED application according to desired correlated color temperature(CCT).
Driver	PHILIPS /MEANWELL / OSRAM / INVENTRONICS	Humidity	10% - 90%		

Lighting Distribution Curve



Technical Drawing

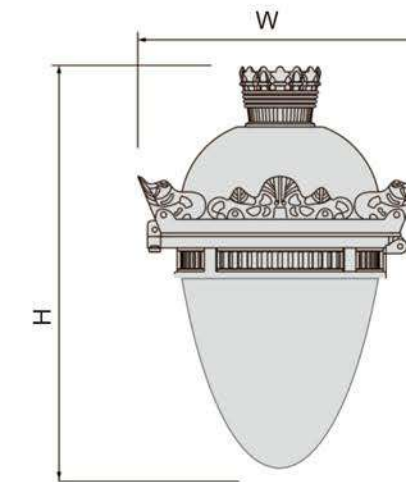

Product Details

Product Code NO	Power W	Luminous Flux lm	Color Temp. K	Luminous Effic. lm/W	Dimensions H*W(mm)	Pcs/Pack	Package (mm)
LSG12A-30	30	3600-4500	2200-6500	120-150	675*Φ440	1	500*500*850
LSG12A-40	40	4800-6000	2200-6500	120-150	675*Φ440	1	500*500*850
LSG12A-60	60	7200-9000	2200-6500	120-150	675*Φ440	1	500*500*850
LSG12A-80	80	9600-12000	2200-6500	120-150	675*Φ440	1	500*500*850
LSG12A-100	100	12000-15000	2200-6500	120-150	675*Φ440	1	500*500*850
LSG12A-120	120	14400-18000	2200-6500	120-150	675*Φ440	1	500*500*850
LSG12A-160	160	19200-24000	2200-6500	120-150	675*Φ440	1	500*500*850
LSG12A-180	180	21600-27000	2200-6500	120-150	675*Φ440	1	500*500*850

